

A complete manual is available at www.sixcase.com

Installation materials:



Washers (4x)

M8 Nuts (4x)

Nylon spacers (4x)

Wall plug 10mm (4x)

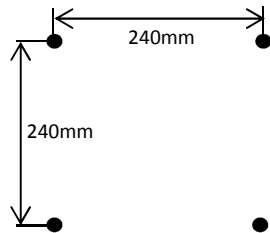
Dowel screw (4x)

Suitable for installation on brick/concrete or wood

IMPORTANT:

- Minimum required wall thickness: 3mm
- Install on a flat surface
- Always use the spacers
- Recommended height: 1.5 – 1.6m upper holes (above ground)
- Install in shadow
- Place adapter indoors

Installation

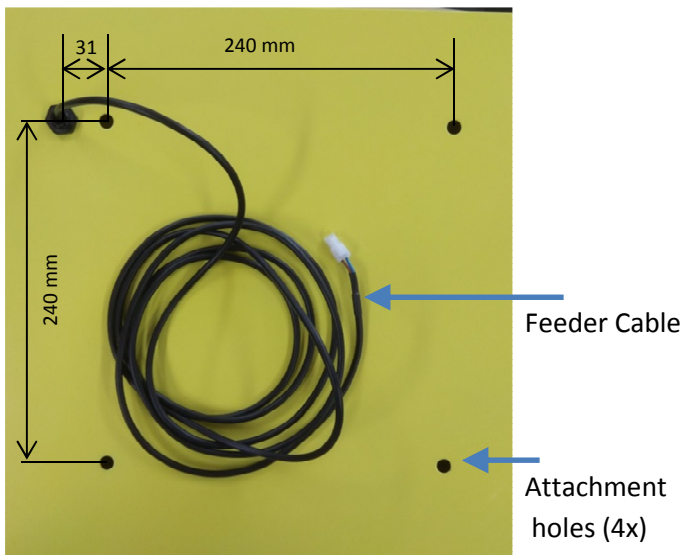


1: Drill 10mm holes (4x)

2: Insert Plugs and dowel screws (20mm protrusion)

3: Place spacers




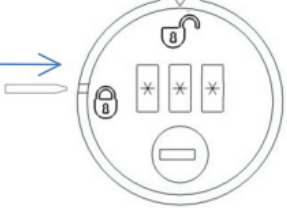
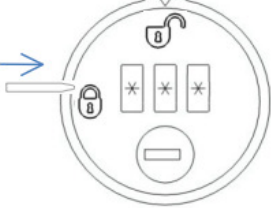


4: Feeder cable: Drill a 12 mm hole through the wall



5: place washers and M8 Nuts on the inside



For the SC1240 only: code lock code change

Security advise	<ol style="list-style-type: none"> 1. On delivery the combination lock is factory set at 333. 2. For safety reasons set the lock immediately to your own personal code. 3. Never leave the code wheels set on your own personal code. 4. Personal code must be set to open the lock and before closing it. 5. In case of lost code the lock can be opened via service key. Please contact the supervisor to open and reset the lock..
Lock opening	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> </div> <ol style="list-style-type: none"> 1. On first use enter the factory set code 333. Otherwise use your own personal code (see point „Code setting“) 2. Turn lock by 90° to  (Lock is then opened)
Code setting	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> </div> <ol style="list-style-type: none"> 1. In <u>open-position</u> and with set code, enter a small solid pin (e.g. paper clip) into the code setting aperture on the side of the lock. Push the pin in fully and hold <u>the pressure</u>. 2. Enter new personal code 3. Remove code setting tool. (personal code is set!)
Emergency opening / Code Finding	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  </div> <div style="text-align: center;">  </div> </div> <ol style="list-style-type: none"> 1. Enter service key into the barrel. Turn key anticlockwise 2. Turn code wheels until they block (Code has been found) 3. Turn service key back and remove it.

Always verify the code change by opening the SmartCase AED cabinet using the new code